Hotmelt Systems

Automatic Granulate Feeder

AGF 1000/2000

Automatic Granulate Feeder

AGF 1000/2000

Hotmelt Systems

- Idle time due to forgetting to top upglue?
- Contamination of glue and tank system due to opening the device?
- Danger of injury when fi lling the appliance?
- Machine contamination due to overfill?

Our automatic granulate feeder solves these problems!

Our automatic granulate feeder stands on the opening in place of the tank fi ller cap. A sensor recognises the glue fi lling level in the tank unit and switches the granulate feed on automatically. When the right quantity is reached the feed is automatically switched off.

For granulate feed the feed hose is installed on the granulate container with the suction nozzle. Hose and container are included in the supply package. The system can be installed on any of the usual glue applicators, no matter what make it is.

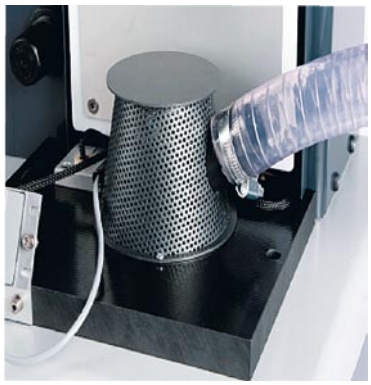

Supply package contains:

Suction feed with feed hopper and receiver, flexible feed hose 3 m, control including status signal lamps and air connector, 1 sensor and sensor control (fi lling signal), granulate container on rollers, volume approx. 100 l, power connection 230 V, adaptor / receiver to fi t the type of device in use.

AGF1000 controls one unit.
AGF2000 controls two units independently

Feed performance	3,5-5 kg / min	Optional:
Feed distance	up to 3 m vertikal	Compressed air vibrator
Power supply	230 V / 50 Hz	Granulate level monitor
air connection	6-10 bar	
air consumption	50-60 l / kg	
air consumption	bei 8 bar 360 l/min	

Subject to technical changes.
Our catalogue offers detailed information

Hotmelt Systems

Römerstraße 15
47809 Krefeld
Tel 02151 7295 - 0
Fax 02151 7295 - 578
info@ues-ag.net

Hotmelt Systems
Guns
Pipes
Modules
Nozzles
Controling
Spare parts